

Variable Pitch Distance "d"
maintains constant power
density across heated surface

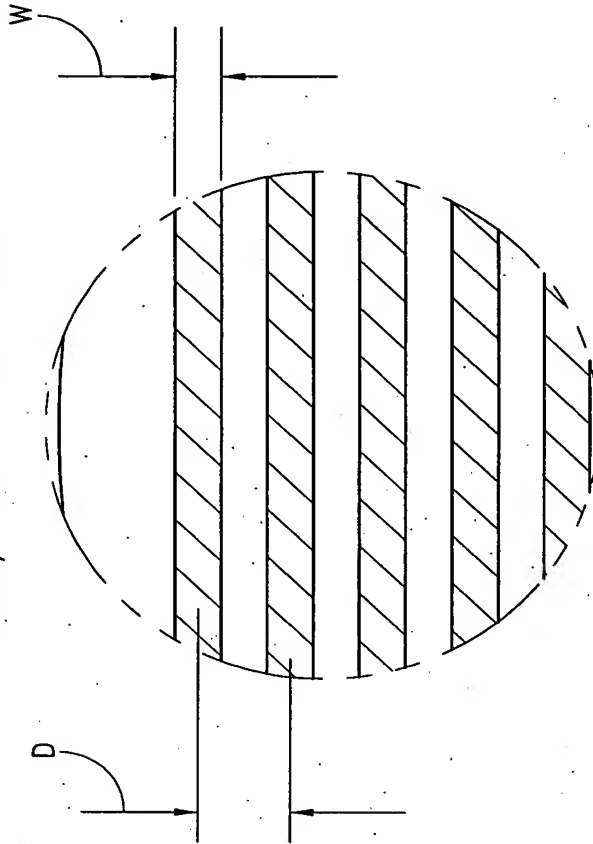


FIG. 4B

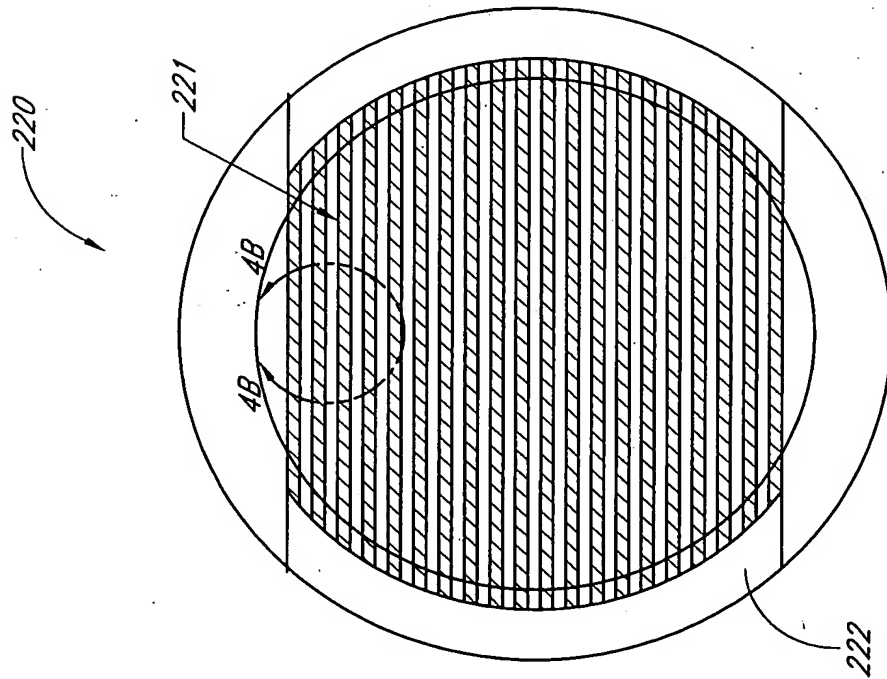


FIG. 4A

SOLID-STATE NON-INVASIVE THERMAL CYCLING SPECTROMETER

Unknown

Appl. No.: Unknown Atty Docket: OPTIS.26CP1C1

4/6

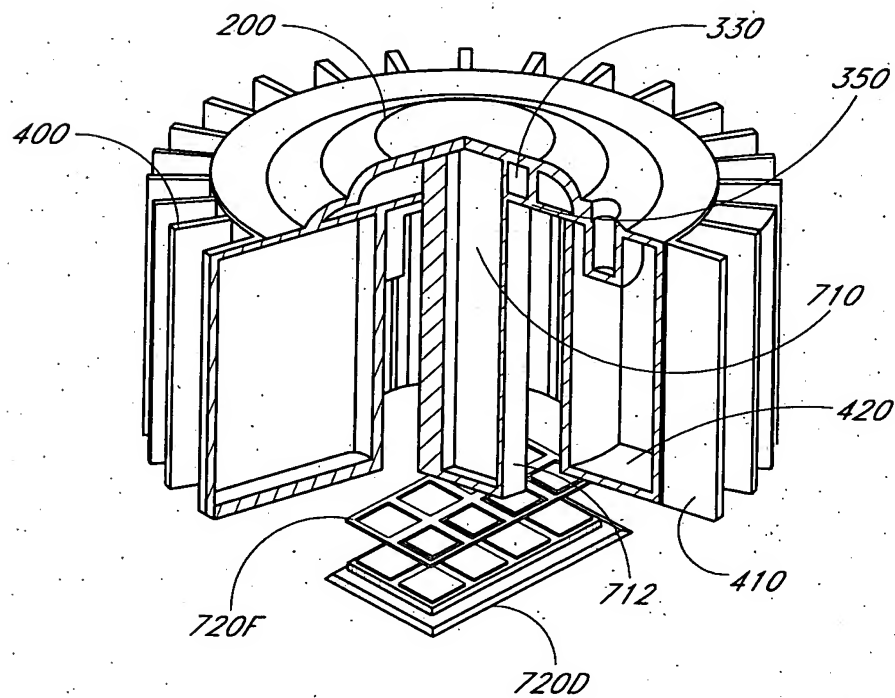


FIG. 5

SOLID-STATE NON-INVASIVE THERMAL CYCLING SPECTROMETER

Unknown

Appl. No.: Unknown Atty Docket: OPTIS.26CP1C1

5/6

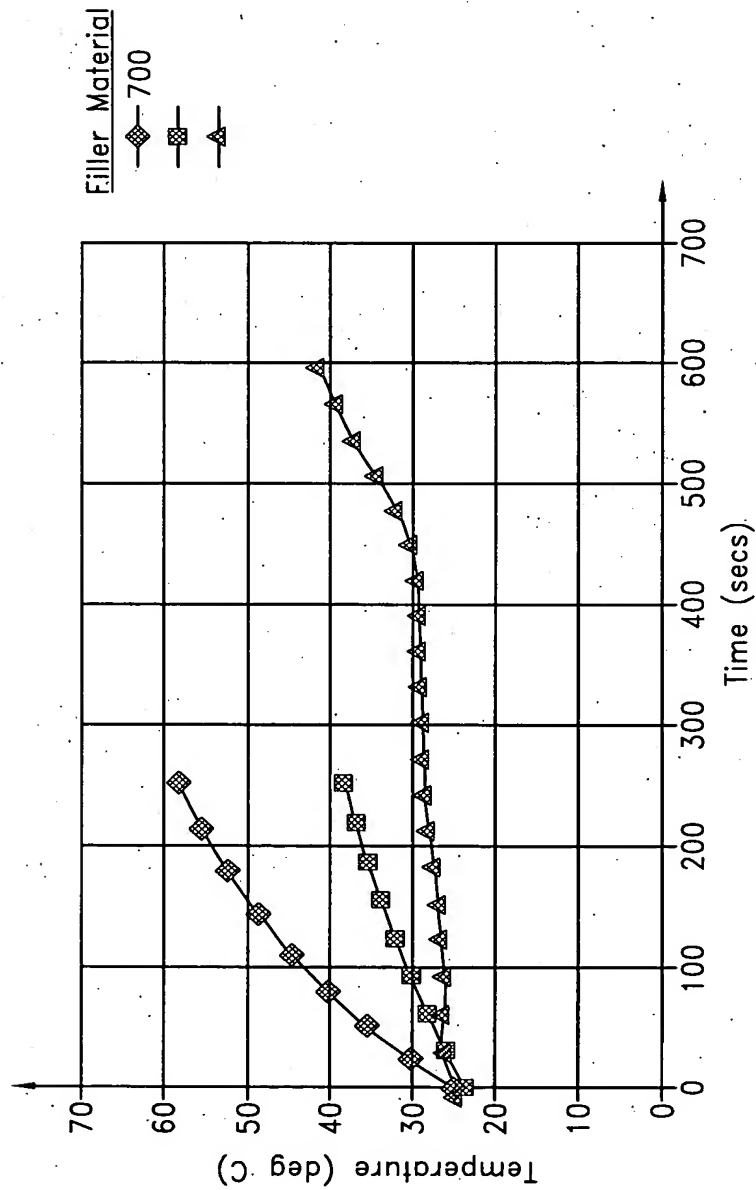


FIG. 6

SOLID-STATE NON-INVASIVE THERMAL CYCLING SPECTROMETER

Unknown

Appl. No.: Unknown Atty Docket: OPTIS.26CP1C1

6/6

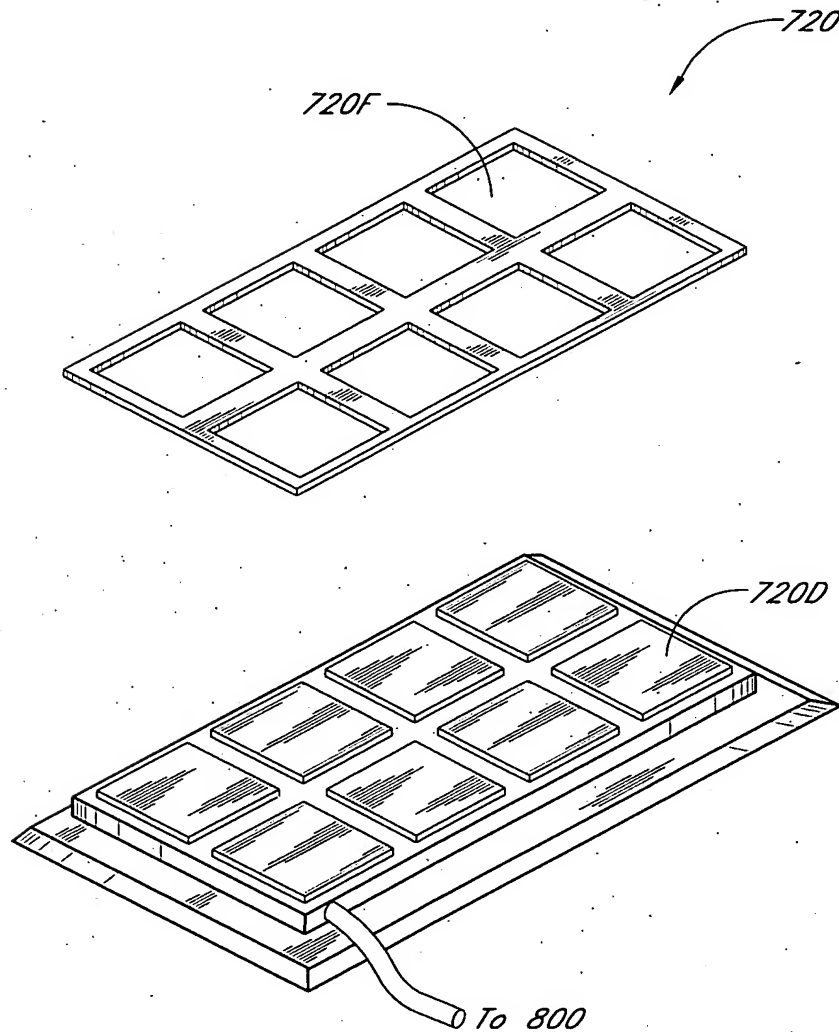


FIG. 7